



SPRING ISOLATORS**MULTIPLE SPRING**2M/3M/4M (300-2200KG)2M/3M/4M (300-2200KG)

	REF / ART.NR	CARGA / LOAD CHARGE / LAST	FLECHA / DEFLECTION FLÈCHE / FEDERWEG	CONSTANTE / STIFFNESS RIGIDITE / STEIFIGKEIT	GRÁFICO DE SELECCIÓN
		kg.	mm.	kg./cm	
2M	2M 300	300	30±3,0	100,00	
	2M 400	400	30±3,0	130,33	
	2M 500	500	30±3,0	166,67	
	2M 700	700	30±3,0	233,33	
	2M 900	900	30±3,0	300,00	
	2M 1100	1100	30±3,0	366,66	
3M	3M 450	450	30±3,0	150,00	
	3M 600	600	30±3,0	200,00	
	3M 750	750	30±3,0	250,00	
	3M 1050	1050	30±3,0	350,00	
	3M 1350	1350	30±3,0	450,00	
	3M 1650	1650	30±3,0	550,00	
4M	4M 600	600	30±3,0	200,00	
	4M 800	800	30±3,0	266,67	
	4M 1000	1000	30±3,0	333,33	
	4M 1400	1400	30±3,0	466,67	
	4M 1800	1800	30±3,0	600,00	
	4M 2200	2200	30±3,0	733,33	

2M

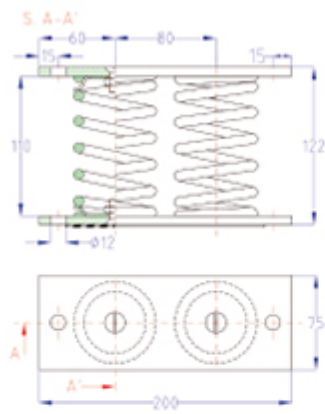

3M

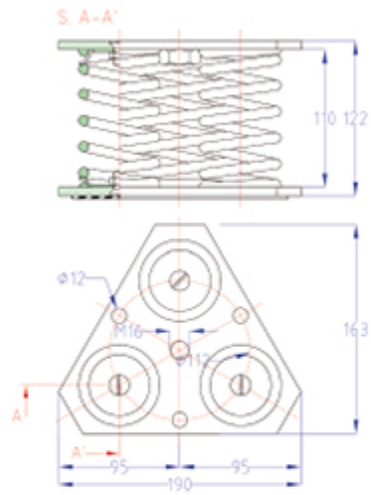

4M

