


SUSTAINERS**SPRING SUSTAINER**SUSTAINER TM/TV

	REF / ART.NR	DIMENSIONES / DIMENSIONS ABMESSUNGEN						COMPRESION / COMPRESSION DRUCKBELASTUNG		CONSTANTE / STIFFNESS RIGIDITE / STEIFIGKEIT	GRÁFICO DE SELECCIÓN
		B	F	H	ØA	ØD	ØC	CARGA / LOAD CHARGE / LAST	FLECHA / DEFLECTION FLECHE / FEDERWEG		
TM		mm.						kg.	mm.	kg./cm	
	TM 25	75	55	100	12	30	11	25	24±3,0	10,42	
	TM 50	75	55	100	12	30	11	50	24±3,0	20,83	
	TM 75	75	55	100	12	30	11	75	24±3,0	31,25	
	TM 100	75	55	100	12	30	11	100	24±3,0	41,67	
	TM 125	75	55	100	12	30	11	125	24±3,0	52,08	
	TM 150	120	75	155	16	30	14	150	35±4,0	42,86	
	TM 200	120	75	155	16	30	14	200	35±4,0	57,14	
	TM 250	120	75	155	16	30	14	250	35±4,0	71,43	
	TM 350	120	75	155	16	30	14	350	35±4,0	100,00	
	TM 450	120	75	155	16	30	14	450	35±4,0	128,57	
	TM 550	120	75	155	16	30	14	550	35±4,0	157,14	
TV	TV 10							10	30±3,0	3,33	
	TV 20							20	20±2,0	10,00	
	TV 30							30	20±2,0	15,00	
	TV 40							40	20±2,0	20,00	



Sustainer TM

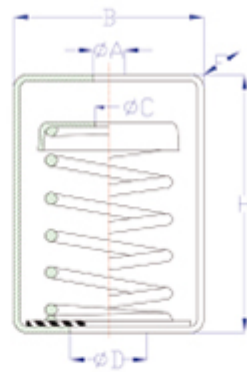

Sustainer TV

