

TECHNICAL DATA SHEET

Acoustic Fabric Panels

Sound absorption for walls and ceiling

Product description and Technical Specification:


Acoustic fabric panels are used for sound absorption on walls and ceiling in public and industrial buildings. The panel has fire retardant characteristics. The covering is acoustic fabric. The dimensions of a panel are 1000x500mm with thickness 50mm. The average sound absorption coefficient is $\alpha_w=0.68$.

- Suitable for indoor conditions
- Classic design
- Good acoustic performance



PHYSICAL CHARACTERISTICS	Standard	Unit	Value	Tolerance
Thickness		mm	50	±2%
Length		mm	1000	±2%
Width		mm	500	±2%
Weight		kg	0,70	±2%

ACUSTIC CHARACTERISTICS	Standard	Unit	Value	Tolerance
Thickness		mm	50	±2%
Sound absorption coefficient α_w	EN ISO 345	-	0.68	

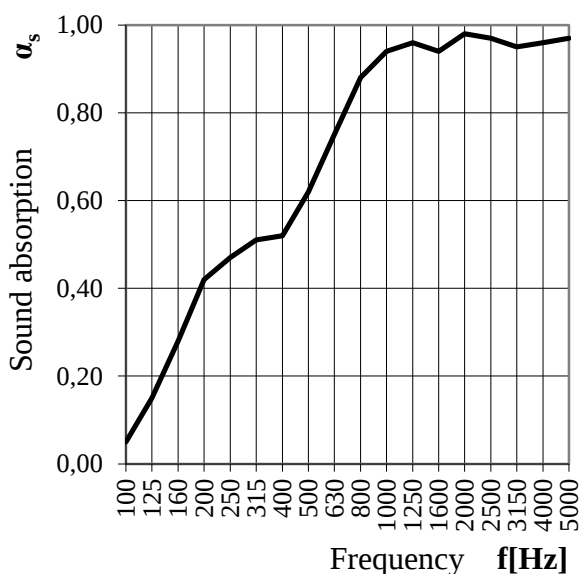

Sound absorption coefficient					
f [Hz]	α_s	f [Hz]	α_s	f [Hz]	α_s
100	0.05	400	0.52	1600	0.94
125	0.15	500	0.62	2000	0.98
160	0.28	630	0.75	2500	0.97
200	0.42	800	0.88	3150	0.95
250	0.47	1000	0.94	4000	0.96
315	0.51	1250	0.96	5000	0.97

TECNICAL CHARACTERISTICS	Standard	Unit	Value	Tolerance
Thermal conductivity (λ)	UNI EN 12667	W/mK	0.035	
Class Reaction to Fire	DIN 4102	-	B1	
Coefficient of Heat Loss (U)		W/m ² K	0.66	

PACKING AND STOWAGE

Indoor storage is obligatory for the produces, repaired from rain. Stowage in a dry and cool place.