

TECHNICAL DATA SHEET

BASE - Acoustic Fabric Panels

Sound absorption for walls and ceiling

Product description and Technical Specification:


Acoustic fabric panels are used for sound absorption on walls and ceiling in public and industrial buildings. The panel has fire retardant characteristics. The covering is acoustic fabric. The dimensions of a panel are 400x250x415mm with thickness 40mm. The average sound absorption coefficient is $\alpha_w=0.68$.

- Suitable for indoor conditions
- Trapezoid design
- Good acoustic performance



PHYSICAL CHARACTERISTICS	Standard	Unit	Value	Tolerance
Thickness		mm	40	±2%
Length base		mm	400	±2%
Length small base		mm	250	±2%
Length of left/right side		mm	415	±2%
Weight		kg	0,150	±2%

ACUSTIC CHARACTERISTICS	Standard	Unit	Value	Tolerance
Thickness		mm	40	±2%
Sound absorption coefficient α_w	EN ISO 345	-	0.68	

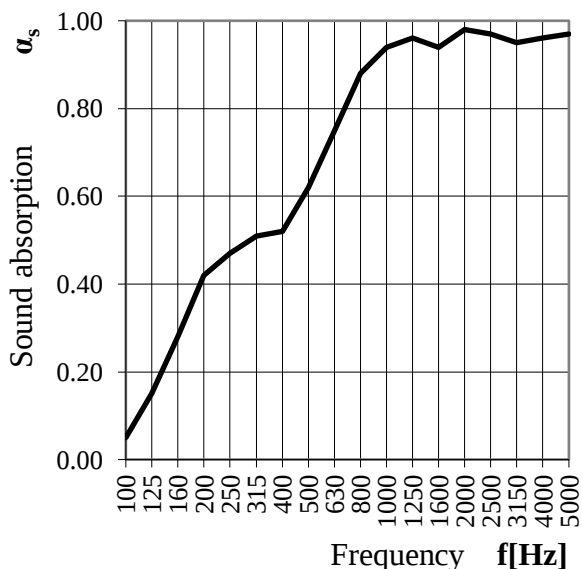

Sound absorption coefficient					
f [Hz]	α_s	f [Hz]	α_s	f [Hz]	α_s
100	0.05	400	0.52	1600	0.94
125	0.15	500	0.62	2000	0.98
160	0.28	630	0.75	2500	0.97
200	0.42	800	0.88	3150	0.95
250	0.47	1000	0.94	4000	0.96
315	0.51	1250	0.96	5000	0.97

TECNICAL CHARACTERISTICS	Standard	Unit	Value	Tolerance
Thermal conductivity (λ)	UNI EN 12667	W/mK	0.035	
Class Reaction to Fire	DIN 4102	-	B1	
Coefficient of Heat Loss (U)		W/m²K	0.66	

PACKING AND STORAGE

Indoor storage is obligatory for the products. Storage in a dry and cool place.