



SPRING ISOLATORS**MULTIPLE SPRING**2N/3N/4N (300-1400KG)

	REF / ART.NR	CARGA / LOAD CHARGE / LAST	FLECHA / DEFLECTION FLÈCHE / FEDERWEG	CONSTANTE / STIFFNESS RIGIDITE / STEIFIGKEIT	GRÁFICO DE SELECCIÓN
2N		kg.	mm.	kg./cm	
	2N 300	300	13±2,0	230,77	
	2N 500	500	13±2,0	384,62	
	2N 700	700	13±2,0	538,46	
3N	3N 450	450	13±2,0	346,15	
	3N 750	750	13±2,0	576,92	
	3N 1050	1050	13±2,0	807,69	
4N	4N 600	600	13±2,0	461,54	
	4N 1000	1000	13±2,0	769,23	
	4N 1400	1400	13±2,0	1076,92	

2N

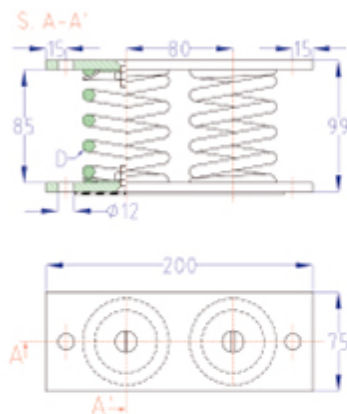

3N

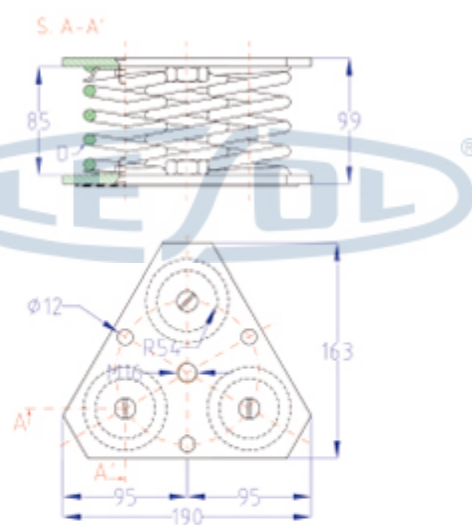

4N

