



SPRING ISOLATORS**SINGLE SPRING**N (10-350KG)

N	REF / ART.NR	DIMENSIONES / DIMENSIONS ABMESSUNGEN							COMPRESION / COMPRESSION DRUCKBELASTUNG		CONSTANTE / STIFFNESS RIGIDITE / STEIFIGKEIT	GRÁFICO DE SELECCIÓN	
		ØA	B	C	D	E	F	G	M	CARGA / LOAD CHARGE / LAST	FLECHA / DEFLECTION FLECHE / FEDERWEG		
		mm.								kg.	mm.	kg./cm	
	N10	55	59						8	10	11±2,0	9,09	
	N15	55	59						8	15	11±2,0	13,64	
	N25	55	59						8	25	11±2,0	22,73	
	N50	55	59						8	50	11±2,0	45,45	
	N75	55	59						8	75	11±2,0	68,18	
	N100	55	59						8	100	11±2,0	90,91	
	N150	73	91						12	150	13±2,0	115,39	
	N250	73	91						12	250	13±2,0	192,31	
	N350	73	91						12	350	13±2,0	269,23	
	N10 B	55	61	90	55	70	10	10	8	10	11±2,0	9,09	
	N15 B	55	61	90	55	70	10	10	8	15	11±2,0	13,64	
	N25 B	55	61	90	55	70	10	10	8	25	11±2,0	22,73	
	N50 B	55	61	90	55	70	10	10	8	50	11±2,0	45,45	
	N75 B	55	61	90	55	70	10	10	8	75	11±2,0	68,18	
	N100 B	55	61	90	55	70	10	10	8	100	11±2,0	90,91	
	N150 B	73	94	110	75	89	11	10	12	150	13±2,0	115,38	
	N250 B	73	94	110	75	89	11	10	12	250	13±2,0	192,31	
	N350 B	73	94	110	75	89	11	10	12	350	13±2,0	269,23	
	N10 BB		63	90	55	70	10	10	8	10	11±2,0	9,09	
	N15 BB		63	90	55	70	10	10	8	15	11±2,0	13,64	
	N25 BB		63	90	55	70	10	10	8	25	11±2,0	22,73	
	N50 BB		63	90	55	70	10	10	8	50	11±2,0	45,45	
	N75 BB		63	90	55	70	10	10	8	75	11±2,0	68,18	
	N100 BB		63	90	55	70	10	10	8	100	11±2,0	90,91	
	N150 BB		95	110	75	89	11	10	12	150	13±2,0	115,38	
N250 BB		95	110	75	89	11	10	12	250	13±2,0	192,31		
N350 BB		95	110	75	89	11	10	12	350	13±2,0	269,23		

N



NB

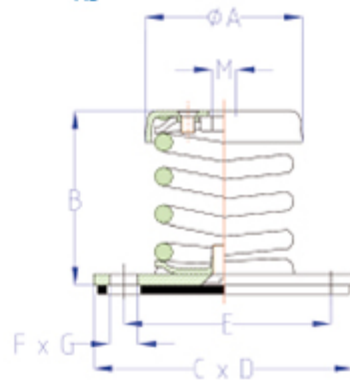

NBB

